

LANDMARK LIFTS LTD

Freefone 0800 652 8138 Web www.landmarklifts.co.uk

Strategos Platform Lift

The 'Strategos' disabled access platform lift provides an ideal solution where the required lift travel height is between 500mm and 1999mm. The Strategos is a unique 'open aspect' platform system designed for both internal and external locations.

Its substantial and rugged construction is hot galvanised steel as standard or can be powder coated giving a colour choice.






STRATEGOS PLATFORM LIF


TECHNICAL SPECIFICATION

Lifting Capacity	300kgs
Lifting Heights	Suitable for 500mm to 1999mm only
Drive System	Double screw and safety nut
Motor	2.5kW
Lifting Speed	60mm per second
Power Supply	240v; 50Hz single phase
Overall Footprint	1300mm wide (plus clearance to both sides)
	x 2000mm long
Platform Size	1040mm wide x 1450mm long clear
Platform Finish	Aluminium non-slip tread-plate flooring
Control System	Constant pressure 'push to run'
Safety Features	Touch sensitive cut-off to underside of platform
	Hand lowering system (in event of power failure)
	Swing gates (inter-locked according to lift position)
Standards	CE marked in accordance with 'The European
	Machinery Directives' 2006/42/EC



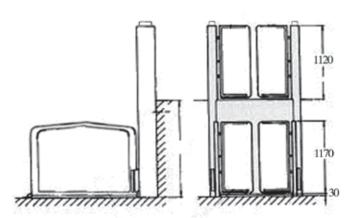

A*. Please contact us for further information



OPTIONS AVAILABLE

Any RAL colour powder coating to all steelwork 90° adjacent entries

Emergency telephone communication system

BENEFITS

Short manufacturing time

Site installation normally around 2 days

Minimal builders work required

Substantial / rugged construction

Suitable for internal & external locations

Pit construction - NOT REQUIRED

No separate lift plant to locate

Landmark Lifts Ltd. 29 Charter Gate, Quarry Park Close, Moulton Park, Northampton NN3 6QB t 0800 652 8138 f 01604 495 111 e info@landmarklifts.co.uk w www.landmarklifts.co.uk Note - all details are correct at time of completion, however, all data maybe subject to change without prior notice. These details cannot form part of a written contract.