




Thorax Model Selection Table

With your required lift car size in mind, please refer to the table below to select the most appropriate Thorax model (either Thorax, Thorax L, or Thorax XL). This will enable you to refer to the separate model specific data sheet.

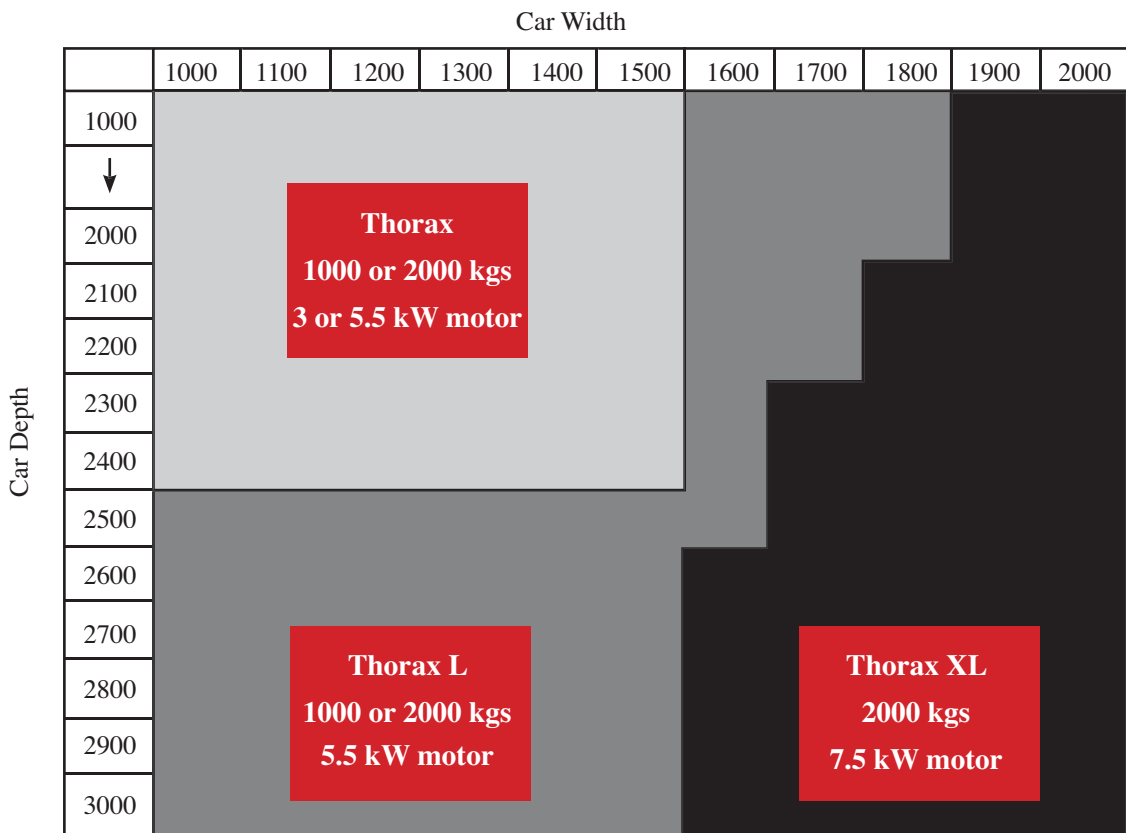

For a Thorax or Thorax L model, with a front open only car, for example, a car depth of 1500 mm will actually have a clear depth of 1450 mm, because of the rear wall. With an open through car, the clear car depth will be 1500 mm.

For a Thorax XL model, with a front open only car, for example, a car depth of 2500 mm will have a clear car depth of 2500 mm, although there is a rear wall. With an open through car the clear car depth is 2550 mm (except for a 3000 mm car).

	Thorax	ThoraxL	ThoraxXL
Shaft width	CW + 460 (+60mm for tolerance)	CW + 510 (+60mm for tolerance)	CW + 540 (+60mm for tolerance)
Shaft depth	CD + 110 (+60mm for tolerance)	CD + 110 (+60mm for tolerance)	CD + 185* (+60mm for tolerance)
Headroom	CH + 650	CH + 650	CH + 850
Pit (or ramp at extra cost)	70	100	150

*when CD=3000, SD=CD+135

THORAX GOODS LIFT