

PEGA MATERIAL HOIST – TWO MAST TOWER VERSION

PIONEER IN INNOVATION

QUALITY – RELIABILITY – USER FRIENDLY

PEGA "PLC" - Programmable Landing Control for exact stops for 100 floors

PEGA "LDS" - Load Detection System – brings up to 70% lower power consumption and higher speed

PEGA "FIS" - Fault Indication System

HOT DIP GALVANIZED CAGES WITH STEEL FLOOR AND ALL ACCESSORIES FOR UNLIMITED LIFETIME - ALL AS STANDARD

PEGA 36 DECK

TECHNICAL DATA

Payload capacity	lb	8000
Speed	ft/min	80
Rated lifting height	ft	38
Max. tie spacing	ft	20

CAGE DIMENSIONS


Internal width	ft	6,0
Internal length	ft	8,0
Railing height	ft	4,0

ELECTRICAL DATA

Power supply range	480V 60Hz 3Ph
Power supply fuse	110A
Motor machinery	PEGA/SEW
Starting current	60A
Power consumption	55kVA
Cable guiding system	Cable bucket

WEIGHTS

Cage	lb	6600
Mast section with one	lb	330
Mast section length	inch	59.37

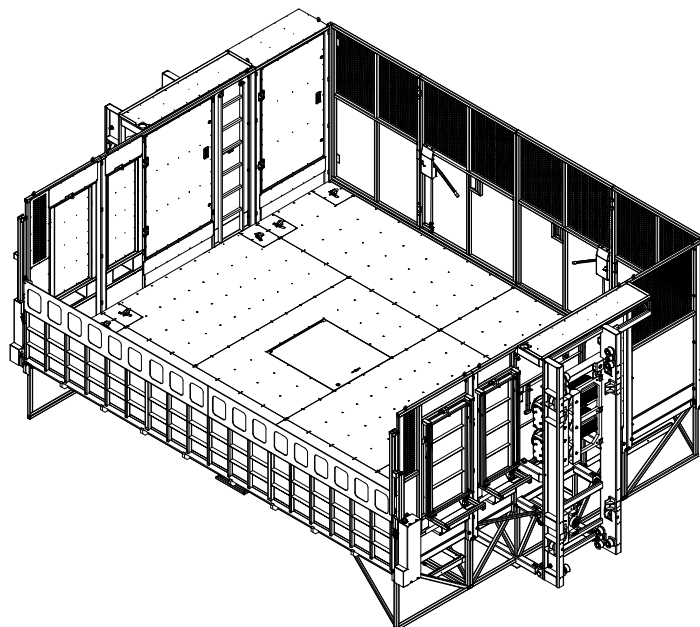

GENERAL

Platforms equipped with frequency controlled drives and programmable control system.

Variety of optional equipment:

Adaptable mast tie systems.

Different dimensions and capacities or executions on request.

Easy self-climbing mast tower.

The above specification may vary based on customer's request.

Norms and regulations: ASME B20.1-2012

CONTROL SYSTEM

Keypad control + floor call system.



CONSULT - SALE - SERVICE

PEGA HOIST Ltd.

Fáblovka 547
CZ – 533 52 Pardubice
Tel.: +420 466 536 348-50
Fax.: +420 466 536 351
E-mail: info@pega-hoist.com
www.pega-hoist.com

Local representative:

